




## THE POWER OF CLEAN EFFICIENT LIGHT

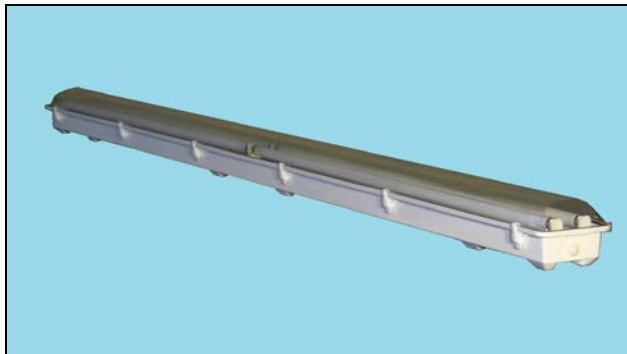

### 8-ft., 4-LAMP T5HO ENCLOSED & GASKETED FIXTURE

The EGI18-4T5HO FG is designed for applications that include general lamination, rough service commercial, industrial, and retail environments. This fixture is ideal for any non-hazardous location application that requires a wet location or dust proof fixture. The EGI18-4T5HO FG is a “made-for-purpose” enclosed and gasketed fixture (not a strip installed into a housing) constructed of Glass Reinforced Polyester (housing) and Acrylic (diffuser) material.

### PROGRAMMED START ELECTRONIC BALLAST

The EGI18-4T5HO FG comes complete with energy efficient programmed start electronic ballasts. The ballasts are Class P type (thermal protection), Class A sound rated and minimum starting temperature of -20/-29 (F/C).

### LISTING

The EGI18-4T5HO FG is certified cETLus for installations in the U.S. or Canada. The fixture is certified to CSA C22.2 No.250.0 and conforms to UL 1598.

## EGI18-4T5HO FG (Fiberglass)

Linear Fluorescent Enclosed & Gasketed  
Fixture

8-ft., 4-Lamp, T5HO (54-watt)

### FEATURES & BENEFITS

- Diffuser is clear acrylic material
- Housing is fiberglass material.
- Silicon gasket between housing and diffuser.
- Celcon hinged clips hold diffuser to housing.
- Internal metal ballast/gear tray and reflector is painted with white enamel.
- Rotary lock lamp holders for positive lamp contact.
- IP65 Rated.
- Quick disconnect is included for ease of installation.
- Engineered for use with T5HO, 54W lamps (not included)

### FIXTURE DIMENSIONS:

<u>Length</u>	<u>Width</u>	<u>Depth</u>	<u>Weight</u>
98.0-in	6.5-in	5.8-in	16-lbs

All dimensions are inches.

Specifications subject to change without notice.

**PHOTOMETRIC DATA:** Available upon request