




THE POWER OF CLEAN EFFICIENT LIGHT

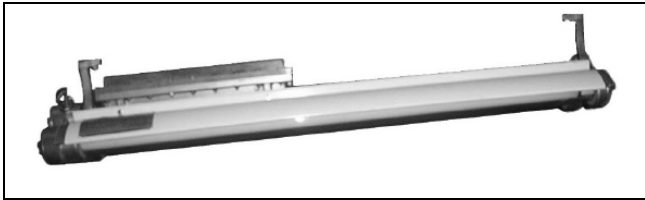

2 or 4-LAMP T5HO EXPLOSION-PROOF FIXTURE

The EPF4 is a T5HO lighting fixture intended for the following explosion-proof applications:

- Class I, Div. 1-Groups C & D
- Class II, Div. 1 & 2 – Groups E,F,G

Typical application includes solvent and cleaning areas, paint spray booths, oil and gas drilling applications, aircraft maintenance, chemical manufacturing, waste treatment plants, oil and gas refining and processing.

The fixture is constructed of extruded aluminum housing and clear glass lamp enclosures. End mounting brackets are standard with fixture.

PROGRAMMED START ELECTRONIC BALLAST

EPF4 models come complete with energy efficient programmed start electronic ballasts. The ballasts are Class P type (thermal protection), Class A sound rated and minimum starting temperature of -20/-29 (F/C).

LISTING

The EPF4 fixture is certified to the following:

- UL 595 – Outdoor Marine Type (salt water)
- UL 844
- UL 924
- UL 1598 Marine Type
- Paint spray booth approved

OPTIONAL ACCESSORIES:

- **Steel wire guard**
EPF4-2-WG (2-lamp model)
EPF4-2-WG (4-lamp model)

EPF4-4-2-46-UNV-T5HO

EPF4-4-4-46-UNV-T5HO

Linear Fluorescent Explosion-Proof

2-Lamp, T5HO (54-watt)

4-Lamp, T5HO (54-watt)

FEATURES & BENEFITS

- F54T5/HO/850 lamps are supplied with the fixture as a standard feature.
- Fixture housing is constructed of extruded aluminum for heavy-duty installation.
- Lamps are enclosed in clear plexi-glass enclosures.
- Lamp enclosures are provided with reflectors.
- Fixture can be surface mounted or suspended.
- Fixture is warranted for one year from delivery date against manufacturing defects. Ballast warranty is provided through the ballast manufacturer.
- Approximate Fixture Dimensions &Weights

4-ft., 2-lamp

Length: 52-inches
Width: 11.3-inches
Height: 8.5-inches
Weight: 65 lbs

4-ft., 4-lamp

Length: 52-inches
Width: 24-inches
Height: 9.5-inches
Weight: 120 lbs

FIXTURE DIMENSIONS:

