LED High Bay,
400-Watt / Beast Series

LHBHS-HB400W-2

LHBHS Series LED High Bay Fixture
This 400W high bay fixture (with IP66 rating - vapor and water tight) delivers high lumen output with exceptional 82+CRI light while achieving 170 lumens per watt. This fixture is designed to replace either metal halide or fluorescent high bay fixtures.

Aluminum Construction
The fixture body, consisting of channel and end plates, is constructed of aluminum. Fixture construction includes stiffening brackets and slide rails to create a strong, clean finished frame.

Electrical
Long-life LED system coupled with electronic driver delivers optimal performance. LED's available in 82+ CRI, 5000k. Projected LED life is greater than 60,000 hours. Fixture is cULus listed. Electronic drivers are available for 120- 277V applications.

Finish
Heatsink raw material: High heat-conducting aviation aluminum alloy body.

Optics
Precision designed optics deliver even illumination. General and aisle distribution ensures superior performance to key areas within an application. Beam angle 120˚ for workshop and tunnel. Three dimensional diamond light guide technology. Light emitting efficiency > 90%

Performance
The LHBHS-HB360W-2 offers >170 lumens/ watt; CRI >80; THD <10%; PF >99. Projected LED life is greater than 60,000 hours. Fixture is standard with long life drivers by Mean Well and LED modules by Philips. LED modules and drivers are offered with a standard 5-year warranty based on performance under normal conditions (consult warranty for details).

Mounting
Standard fixture can be suspended with aircraft cable or chain, or pendant mounted. NOTE: safety chain by others is recommended for applications that may subject the fixture to possible impact.

Compliance
This fixture is UL listed and IP66 rated for wet locations and –20°C to +40°C ambient environments. DLC and RoHS compliant. LED modules comply with IESNA LM-79 and LM-80 standards.

Fixture Dimensions:

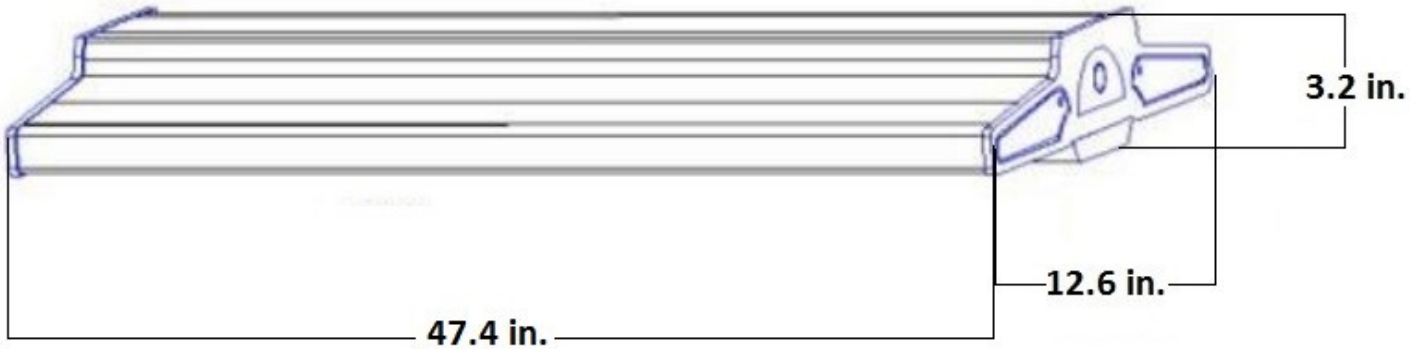

Approximate fixture weight – 21 U.S. Pounds (9.5 kg)