† Truex Lighting

RHB Series LED High Bay Fixture

The RHB1-HG-F10-200W-GIE round high bay fixture (with IP65 rating - vapor and water tight) delivers high lumen output with exceptional 82+CRI light while achieving 26,000 lumen output levels. Tempered glass lens design achieves transmittance levels of 93%. The RHB Series round high bay fixture is designed to replace either HID or fluorescent high bay fixtures.

Aluminum Construction

The fixture body, consisting of aluminum finned material acts as an excellent heatsink channeling heat out and away from the LED's.

Electrical


Long-life Philips LED system delivers optimal performance. LED's available in 82+ CRI, 5000k. Projected LED life is greater than 50,000 hours. Fixture is cULus listed. Electronic drivers are available for 120- 277V and 347/480V applications.

Finish

Black power coated aluminum construction provides protection against contaminants and oxidation.

Optics

Precision designed optics deliver even illumination. General and aisle distribution ensures superior performance to key areas within an application. The tempered lens design allows maximum delivered lumens while maintaining IP65 rating.

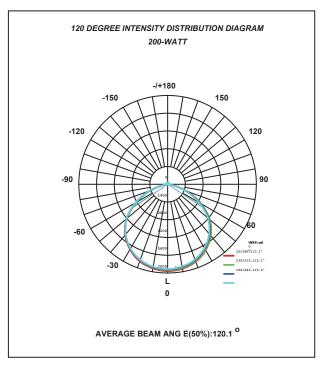

Round LED High Bay 200-Watt 26,000 lumens



RHB1-HG-F10-200W-GIE

Performance

The RHB luminaire offers:

- > 130 Lumens/Watt
- > CRI >80; THD <10%
- ➤ PF >99
- Projected LED life is greater than 50,000 hours

Electrical and Warranty

Fixture is standard with long life LED modules by Philips. LED modules and drivers are offered with a standard 5-year warranty based on performance under normal conditions (consult warranty for details).

Compliance

This fixture is UL listed and IP65 rated for wet locations and -40°C to +40°C ambient environments. DLC and RoHS compliant. LED modules comply with IESNA LM-79 and LM-80 standards.

Fixture Weights and Dimensions RHB1-HG-F10-200W-GIE

