



Truex Lighting



Industrial & Commercial LED Lighting

Truex Lighting



Truex Lighting has been designing and manufacturing extreme quality LED and fluorescent lighting products since 2004. Today, our sole focus is serving the industrial and commercial lighting markets. Our product line is unique and diverse, filled with products designed to be contractor friendly and fairly priced, without sacrificing quality. You will find Truex products in manufacturing, warehousing, retail and refining facilities of many of the world's largest corporations.



Truex Lighting - About Us.



TABLE OF CONTENTS

Explosion Proof and Hazardous Location	
Linear	5-10
Non-Linear	11-20
High Bays	21-26
IP65 Vapor Tights	27-29
Strip Fixtures	30-32
General Area Lighting	33-40
Parking Garage Fixtures	34
Commercial Recessed and Surface Mounting	41-43
Truex Core Values	44





Our Classified (explosion proof and hazardous location) fixture category is one of the four primary elements that make up our industrial line. We offer a complete line of high quality, diversified fluorescent and LED hazardous location fixtures that fit the majority of applications, ranging from paint shop to refinery environments.

LED Hazardous Location Lighting

Truex Lighting

**Hazardous Location
HLLB Low Bay / Area Light**



Our classified linear low bay / area light produces 8,400 lumens using 60-watts. The HLLB-H4-60W-UNV meets the following classifications:

- Class I Division 2, Group A, B, C, D
- Class II Division 1, Group E, F, G
- Class II Division 2, Group E, F, G
- Class III

MODEL NUMBER

**HLLB-H4-60W-UNV
60-WATT**



Hazardous Location

HL1-4 Series Non-Metallic Linear Fixture



The HL1-4 is designed for applications requiring corrosion resistant fixtures. Excellent for marine wet and damp locations. Inside of fixture is drip-proof. Typical applications include solvent and cleaning areas, petrochemical facilities, marine facilities, waste treatment plants and food processing applications. Housing is non-metallic glass reinforced polyester. Gasket is poured in place. Latches are stainless steel locking type. Diffuser is high impact acrylic. The HL1-4 meets the following classifications:

Class I Division 2, Group A, B, C, D

MODEL NUMBER

HL1-4-2-LED-UNV
80-watt

HL1-4-3-LED-UNV
120-watt

**Hazardous Location
HL3-4 Series Metallic Linear Fixture**



The HL3-4 is a hazardous location fixture designed for applications requiring metallic fixtures. Typical applications include chemical plants, water treatment, paper mills, machining areas and coal and dust storage areas. Fixture housing is constructed of industrial grade aluminum with clear diffuser/lens. The HL3-4 meets the following classifications:

Class I Division 2, Group A, B, C, D

MODEL NUMBER

**HL3-4-2-LED-UNV
80-watt**

**HL3-4-3-LED-UNV
120-watt**



**Explosion Proof
EPLB Low Bay / Area Light**



Our classified linear low bay / area light produces 8,400 lumens using 60-watts. The EPLB-I-60W-UNV meets the following classifications:

- Class I, Division 1, Groups C, D
- Class I, Division 2, Groups A, B, C, D
- Class II, Division 1, Groups E, F, G
- Class II, Division 2, Groups E, F, G
- Class III

MODEL NUMBER

**EPLB-I-60W-UNV
60-WATT**



**Explosion Proof
EP4-4 Series Metallic Linear Fixture**



The EP4-4 is an explosion proof fixture. Typical application includes solvent and cleaning areas, paint spray booths, oil and gas drilling applications, aircraft maintenance, chemical manufacturing, waste treatment plants, oil and gas refining and processing. Housing constructed of aluminum and clear glass lamp enclosures. End mounting brackets are standard with fixture. The EP4-4 meets the following classifications:

Class 1, Division1, Groups C & D
Class II, Division 1 & 2 – Groups E,F,G
Outdoor Marine Type (saltwater) Paint Spray Booth Approved
UL 844, UL 924,
UL 1598 Marine Type

MODEL NUMBER

**EP4-4-2-LED-UNV
80-watt**

**Hazardous Location
HL7-4 Series Linear High Bay Fixture**



The HLF7-4 is a hazardous location fixture designed for applications requiring metallic fixtures. Typical applications include chemical plants, water treatment, paper mills, machining areas and coal and dust storage areas. Fixture housing is constructed of industrial grade steel with clear diffuser/lens. The HL7-4 meets the following classifications:

Class I Division 2, Group A, B, C, D
Class 2, Division 2

MODEL NUMBER

HL7-4-2-LED-UNV

80-watt

HL7-4-3-LED-UNV

120-watt

HL7-4-4-LED-UNV

160-watt

HL7-4-6-LED-UNV

240-watt



Hazardous Location HLFL Series Flood Light/High Bay/Surface Mount



Our line of non-linear classified high output flood/high bay fixtures consists of products ranging from 60-watt to 200-watt. The fixtures can be used as flood lights, high bay lights or standard floor/wall/ceiling mounted classified lighting. The HLFL Series meets the following classifications:

Class I Division 2, Group A, B, C, D
Class II Division 1, Group E, F, G
Class II Division 2, Group E, F, G
Class III

MODEL NUMBERS

HLFL-A-60W-UNV
60-watt

HLFL-A-100W-UNV
100-watt

HLFL-A-150W-UNV
150-watt

HLFL-A-200W-UNV
200-watt



Hazardous Location HLRAL Series Area Light



Our line of non-linear classified area light fixtures consists of products ranging from 60-watt to 200-watt. The fixtures are typically used for general area lighting and can be used in both interior and exterior environments. The HLRAL Series meets the following classifications:

Class I Division 2, Group A, B, C, D
Class II Division 1, Group E, F, G
Class II Division 2, Group E, F, G
Class III

MODEL NUMBERS

HLRAL-H4-60W-UNV
60-watt

HLRAL-H4-100W-UNV
100-watt

HLRAL-H4-150W-UNV
150-watt

HLRAL-H4-200W-UNV
200-watt

Hazardous Location HLAL Series Area Light



Our line of non-linear classified area light fixtures consists of products ranging from 100-watt to 300-watt. The fixtures are typically used for general area lighting and can be used in both interior and exterior environments. The HLAL Series meets the following classifications:

Class I Division 2, Group A, B, C, D
Class II Division 1, Group E, F, G
Class II Division 2, Group E, F, G
Class III

MODEL NUMBERS

HLAL-M-100W-UNV
100-watt

HLAL-M-150W-UNV
150-watt

HLAL-M-200W-UNV
200-watt

HLAL-M-250W-UNV
250-watt

HLAL-M-300W-UNV
300-watt



Hazardous Location HLMPL Series Interior/Exterior Multi-Purpose Light



Our line of non-linear classified multi-purpose light fixtures consists of products ranging from 80-watt to 240-watt. The fixtures are typically used for high bays, low bays, security and general area lighting and can be used in both interior and exterior environments. The HLMPL Series meets the following classifications:

Class I Division 2, Group A, B, C, D
Class II Division 1, Group E, F, G
Class II Division 2, Group E, F, G
Class III

MODEL NUMBERS

HLMPL-P-80W-UNV
80-watt

HLMPL-P-150W-UNV
150-watt

HLMPL-P-240W-UNV
240-watt

Explosion Proof EPRFL Series Flood Light



Our line of non-linear classified flood light fixtures consists of products ranging from 80-watt to 240-watt. The fixtures are typically used for flood, high bay and general area lighting and can be used in both interior and exterior environments. The EPRFL Series meets the following classifications:

Class I Division 1, Group C, D
Class I Division 2, Group A, B, C, D
Class II Division 1, Group E, F, G
Class II Division 2, Group E, F, G
Class III

MODEL NUMBERS

EPRFL-C-80W-UNV
80-watt

EPRFL-C-100W-UNV
100-watt

EPRFL-C-150W-UNV
150-watt

EPRFL-C-200W-UNV
200-watt

EPRFL-C-240W-UNV
240-watt



Explosion Proof EPSFL Series Flood Light



Our line of non-linear classified square flood light fixtures consists of products ranging from 40-watt to 220-watt. The fixtures are typically used for flood, high bay and general area lighting and can be used in both interior and exterior environments. The EPSFL Series meets the following classifications:

Class I Division 1, Group C, D
Class I Division 2, Group A, B, C, D
Class II Division 1, Group E, F, G
Class II Division 2, Group E, F, G
Class III

MODEL NUMBERS

EPSFL-D-40W-UNV 40-watt	EPSFL-D-150W-UNV 150-watt
EPSFL-D-60W-UNV 60-watt	EPSFL-D-180W-UNV 180-watt
EPSFL-D-80W-UNV 80-watt	EPSFL-D-200W-UNV 200-watt
EPSFL-D-100W-UNV 100-watt	EPSFL-D-220W-UNV 220-watt
EPSFL-D-120W-UNV 120-watt	



Explosion Proof EPPL Series Jar Light



Our line of non-linear classified portable light fixtures consists of products ranging from 5-watt to 9-watt. The fixtures are typically used for general lighting and can be used in both interior and exterior environments. The EPPL Series meets the following classifications:

Class I Division 1, Group C, D
Class I Division 2, Group A, B, C, D
Class II Division 1, Group E, F, G
Class II Division 2, Group E, F, G
Class III

MODEL NUMBERS

EPPL-L-5W-UNV
5-watt

EPPL-L-7W-UNV
7-watt

EPPL-L-9W-UNV
9-watt

Explosion Proof EPSJL Series Jar Light



Our line of non-linear classified jar light fixtures consists of products ranging from 20-watt to 40-watt. The fixtures are typically used for general area lighting and can be used in both interior and exterior environments. The EPLJL Series meets the following classifications:

Class I Division 1, Group C, D
Class I Division 2, Group A, B, C, D
Class II Division 1, Group E, F, G
Class II Division 2, Group E, F, G
Class III

MODEL NUMBERS

EPSJL-G-20W-UNV
20-watt

EPSJL-G-30W-UNV
30-watt

EPSJL-G-40W-UNV
40-watt

Explosion Proof EPLJL Series Jar Light



Our line of non-linear classified jar light fixtures consists of products ranging from 40-watt to 100-watt. The fixtures are typically used for general area lighting and can be used in both interior and exterior environments. The EPLJL Series meets the following classifications:

Class I Division 1, Group C, D
Class I Division 2, Group A, B, C, D
Class II Division 1, Group E, F, G
Class II Division 2, Group E, F, G
Class III

MODEL NUMBERS

EPLJL-F-40W-UNV
40-watt

EPLJL-F-60W-UNV
60-watt

EPLJL-F-80W-UNV
80-watt

EPLJL-F-100W-UNV
100-watt

Explosion Proof EPEX Series Exit



Our line of non-linear classified exit fixtures consists of products ranging from 3-watt to 11-watt. The fixtures can be used in both interior and exterior environments. The EPEX Series meets the following classifications:


Class I Division 1, Group C, D
Class I Division 2, Group A, B, C, D
Class II Division 1, Group E, F, G
Class II Division 2, Group E, F, G
Class III

MODEL NUMBERS

EPEX-J-3W-UNV
3-watt

EPEX-J-7W-UNV
7-watt

EPEX-J-11W-UNV
11-watt

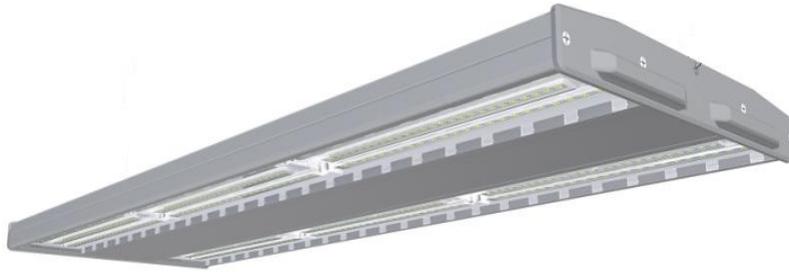

The Truex LED high bay line is extremely diverse and includes fixtures for a very wide variety of applications. We offer several models with very high efficacy as well as IP ratings ranging from IP65 to IP27. Our line also includes high quality economy fixtures. Our LED high bay line is designed to offer a broad lumen output range (from 11,000 to 85,000 lumens), industry leading performance, quality and affordability.

LED High Bay Lighting

Truex Lighting

“Utility Line Series” Linear LED High Bays



The LHBM Series High Bays are the perfect fit for both industrial and retail environments. This compact LED high bay series are ideal for one-to-one replacement of HID or T8 and T5HO fluorescent fixtures with mounting heights from 15-ft. to 45-ft. Excellent for use in any type of retail or industrial facility.

The LED's are covered by a lightly frosted diffuser which softens the emitted light and precision designed optics deliver even illumination. General and aisle distribution ensures superior performance to key areas in every environment. Each captive frosted lens is designed to eliminate the pixeling effect that is an issue with other “open” LED fixtures.

“Utility Line “
Linear LED High Bays

MODEL NUMBERS

LHBM-2-90
11,800 lumen output

LHBM-2-130
17,650 lumen output

LHBM-2-180
24,500 lumen output

LHBM-2-205
29,000 lumen output

LHBM-2-270
36,000 lumen output

LHBM-2-300
40,000 lumen output



The LHBM series high bay fixtures are designed to replace either metal halide or fluorescent high bay fixtures. The luminaire offers >133 Lumens/Watt; CRI >80; THD 99. Projected L70 life is >50,000 hours. Fixture is standard with long life 120-277 volt drivers and high performance LED modules. LED modules and drivers are offered with a standard 5-year warranty based on performance under normal conditions (consult warranty for details).

**“The Beast Series”
Ultra High Output Linear LED High Bays**



IP65 BEAST High Bay

MODEL NUMBERS

IP65

IP54

**LHBHS-HB100W-2 / LHBHS-HB100W-5
2FT., 100 watt, 17,000 lumen output**

**LHBHS-HB150W-2 / LHBHS-HB150W-5
2FT., 150 watt, 25,500 lumen output**

**LHBHS-HB200W-2 / LHBHS-HB200W-5
2FT., 200 watt, 34,000 lumen output**

**LHBHS-HB250W-2 / LHBHS-HB250W-5
2FT., 250 watt, 42,500 lumen output**


**LHBHS-HB300W-2 / LHBHS-HB300W-5
4FT., 300 watt, 51,000 lumen output**

**LHBHS-HB360W-2 / LHBHS-HB360W-5
4FT., 360 watt, 61,200 lumen output**

**LHBHS-HB400W-2 / LHBHS-HB400W-5
4FT., 400 watt, 68,000 lumen output**

**LHBHS-HB500W-2 / LHBHS-HB500W-5
4FT., 500 watt, 85,000 lumen output**

The LHBHS series high bay fixtures are available in either IP54 or IP65 configurations and deliver extremely high 170 lumen per watt output with exceptional 82 + CRI light while achieving total lumen output ranging from 17,000 to 85,000 lumens. The fixture is designed to replace either metal halide (400 watt to 1500 watt) or fluorescent (6-lamp to 16-lamp T5HO) high bay fixtures. The fixture is constructed of high heat conducting aviation aluminum alloy. Standard fixture can be suspended with aircraft cable or chain.

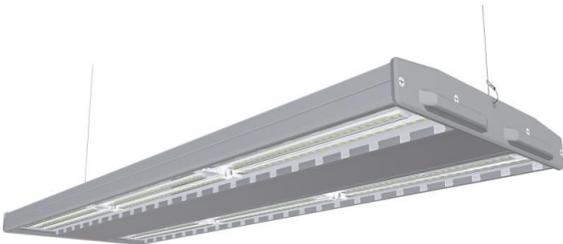

IP54 BEAST High Bay

**“The Beast Series”
Ultra High Output Linear LED**



The LHBHS series is the ultimate in high lumen output high bay fixtures. Available for single fixture lumen output as high as 85,000 lumens. Featuring light output of 170 lumens per watt, this fixture series is made for high facility hanging heights where high light output is desired. The fixtures are rated IP65 (water and dust proof) and do not require reflectors.

The "Torpedo Series" Ultra High Output Linear LED High Bays



IP65 TORPEDO High Bay


The LHBHS-HB-1/4 Torpedo Series High Bay fixtures are IP65 or IP54 rated (vapor and water tight). They deliver high lumen output with exceptional 82 + CRI light while achieving a lumen output range from 17,000 to 42,500 lumens. This fixture is designed to replace either metal halide or fluorescent high bays, indoor and outdoor strips, area, wall wash and vapor tight fixtures. The fixture body, consisting of channel and end plates, is constructed using high heat conducting aviation material. Standard fixture can be suspended with aircraft cable or chain or surface mounted.

MODEL NUMBERS

IP65

IP54

- LHBS-HB100-1 / LHBS-HB100-4
2-FT., 100 watt, 17,000 lumen output
- LHBS-HB150-1 / LHBS-HB150-4
3-FT., 150 watt, 25,000 lumen output
- LHBS-HB200-1 / LHBS-HB200-4
4-FT., 200 watt, 34,000 lumen output
- LHBS-HB250-1 / LHBS-HB250-4
4-FT., 250 watt, 42,500 lumen output

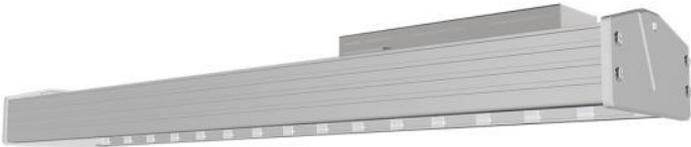

IP54 TORPEDO High Bay



“Lensed Economy Line Series” Linear LED High Bays

The SSLED-HB High Bay Series is an excellent choice for a wide variety of applications and mounting heights. The SSLED-HB fixtures are manufactured with an aluminum housing and acrylic lens. Precision designed optics, multiple distributions, and a choice of lumen outputs and color temperatures make it energy efficient. SSLED-HB is the ideal solution for most any high bay application that requires an acrylic lens.



“Lensed Economy Line” Linear LED High Bays

MODEL NUMBERS

SSLED-HB-110-50-UNV
2-FT., 110 watt 15,400 lumen output

SSLED-HB-165-50-UNV
2-FT., 165 watt 23,100 lumen output

SSLED-HB-225-50-UNV
4-FT., 225 watt 31,500 lumen output



The SSLED-HB high bay fixture is designed to replace either metal halide or fluorescent high bay fixtures. Long-life LED system coupled with electronic driver delivers optimal performance. Projected LED life is >50,000 hours. Fixture is cULus listed and DLC Premium. Electronic drivers are standard for 120-277V applications.

The "Saucer Series" Round LED High Bays



RHB1-6

The RHB Series round high bay fixture (P65 rated - vapor and water tight) delivers high lumen output with exceptional 82+CRI light while achieving 12,800 (97 watt), 18,500 (140 watt), 25,000 (190 watt), 32,800 (200 watt), 40,100 (250 watt), 49,500 (300 watt) and 55,500 (340 watt) lumen output levels. Lens design achieves transmittance levels of 93%. The RHB Series round high bay fixture is designed to replace



RHB2-5

"Saucer Series" Round LED High Bays

The "Saucer" fixture body, consisting of aluminum finned material acts as an excellent heatsink channeling heat out and away from the LED's. Long-life Philips LED system coupled with Meanwell electronic driver delivers optimal performance. LED's available in 82+ CRI, 5000k. Projected LED life is greater than 50,000 hours. Fixture is cULus listed. Precision designed optics deliver even illumination. General and aisle distribution ensures superior performance to key areas within an application. The tempered lens design allows maximum delivered lumens while maintaining IP65 rating.

MODEL NUMBERS

RHB1-6-M-100
97 watt, 12,800 lumen output

RHB1-6-M-150
140 watt, 18,500 lumen output

RHB1-6-M-200
190 watt, 25,000 lumen output

RHB2-5-M-200
200 watt, 32,800 lumen output

RHB2-5-M-250
250 watt, 40,100 lumen output

RHB2-5-M-300
300 watt, 49,500 lumen output

RHB2-5-M-340
340 watt, 55,500 lumen output





IP65 linear vapor tight lighting is one of our strengths. We have been providing fluorescent and LED linear vapor tight lighting since our inception. Our LED vapor tight line includes fixtures with extruded aluminum housings providing excellent heat dissipation, particularly in comparison to the traditional fiber glass or polycarbonate fixtures. The use of an extruded aluminum housing not only optimizes the heat dissipation, but also creates a sleek, modern look which allows the fixture to be used in many more applications than the traditional fiber glass fixture.

LED Vapor Tight Lighting

Truex Lighting

LED IP65 Vapor Tight Fixtures

4-ft. MODEL NUMBER

LVTSHB-4-60W-5K
4-FT., 60 watt, 6,600 lumen output

The LVTSHB Vapor Tight Series is an excellent choice for a highly efficient, low cost vapor tight solution. The LVTSHB is a 4-ft. long, IP65 (waterproof) fixture with an extruded aluminum body which provides excellent heat dissipation. The diffuser is high strength polycarbonate, which in combination with the aluminum body, makes the fixture virtually indestructible.

** Fixtures are also available by special order in 2-ft., 3-ft., 5-ft., and 6-ft. lengths.



8-ft. MODEL NUMBER

LVTSHB-8-120W-5K
8-FT., 120 watt, 13,200 lumen output

The LVTSHB Vapor Tight Series is an excellent choice for a highly efficient, low cost vapor tight solution. The LVTSHB is a 8-ft. long, IP65 (waterproof) fixture with an extruded aluminum body which provides excellent heat dissipation. Diffuser is high strength polycarbonate, which in combination with the aluminum body, makes the fixture virtually indestructible.



Ultra High Lumen LED IP66 Vapor Tight Fixtures

IP66 vapor tight (water and dust proof) fixture designed to provide ultra-high lumen output to replace either metal halide or fluorescent indoor and outdoor strips, area lighting, wall wash and vapor tight fixtures.



Fixture can be suspended with aircraft cable or chain, or surface mounted in individual or row-mount configuration

The LHBHS-VT-1 high lumen vapor tight fixture is IP66 rated (vapor and water tight) delivers high lumen output with exceptional 82 + CRI light while achieving a lumen output range from 12,000—42,500 lumens. This fixture is designed to replace either metal halide or fluorescent in indoor and outdoor environments. The fixture body, consisting of channel and end plates, is constructed using high heat conducting aviation material. Fixture can be suspended with aircraft cable or chain or surface mounted.

MODEL NUMBERS

LHBS-HB-100-1
2-FT., 100 watt, 17,000 lumen output
LHBS-HB150-1
3-FT., 150 watt, 25,000 lumen output
LHBS-HB200-1
4-FT., 200 watt, 34,000 lumen output
LHBS-HB250-1
4-FT., 250 watt, 42,500 lumen output





Strip lighting has always been a large component of the lighting industry. This type fixture is used in very diverse applications ranging from residential to retail to heavy industrial. Our LED strip lines are represent excellence in strip lighting quality and design.

LED Strip Lighting

Truex Lighting

Modern Extruded Aluminum Slim Line LED Strip IP42 Rated

MODEL NUMBERS

LMS-4-30W-5K
4-ft., 30 watt, 3,300 lumen output

LMS-8-60W-5K
8-ft., 60 watt, 6,600 lumen output

** Fixtures are also available by special order in 2-ft., 3-ft., 5-ft., and 6-ft. lengths.



The LMS LED Strip Series is the ultra smart choice for retro-fit fluorescent strip replacement or new build. The fixture consists of an extruded aluminum housing, providing excellent heat dissipation and a high strength polycarbonate diffuser. The fixture is available in 4-ft. and 8-ft models. The LMS LED strip provides a low cost high value solution to any type of LED strip requirement.

IP42-Ingress Protection rating

- Protected against solid objects over 1 mm (tools, wires, and small wires)
- Protection against direct sprays of water up to 15° from the vertical



LED Strip Fixtures

The LMS Series fixture is an IP42 damp location LED strip fixture for use in indoor applications. The LMS Series is designed for horizontal (ceiling) or vertical (wall) surface mounting or hanging applications. The high performance optical system delivers general ambient lighting for applications such as food service, agricultural, retail, warehouse and general commercial and industrial environments.

“L-SS Series” Traditional Style LED Strips



The traditional design of the all-purpose L-SS series makes it the ideal solution to any commercial, industrial or residential application. The L-SS series energy efficient LED strip light fixtures will modernize any environment. Recommended for retail, office, warehouse, manufacturing, parking garage or general area lighting.

MODEL NUMBERS

L-SS-4-30W-5K

4-ft., 30 watt 4,500 lumen output

L-SS-8-60W-5K

8-ft., 60 watt 9,000 lumen output



“L-SS Series” Traditional Style LED Strips

The L-SS series fixtures can be surface mounted or suspended. The fixture body is steel, white powder coated and the frosted diffuser is acrylic material.



General area lighting is an extremely broad term. The Truex line includes lighting for parking garage, flood, parking lot applications and includes several different styles of wall packs and canopy lights.

LED General Area Lighting

Truex Lighting

IP65 Parking Garage Lighting L-CPPG Series and LVTSHB Series

The L-CPPG Series is specifically designed for parking garage applications. The standard fixture light pattern is designed for typical parking garage applications. The fixture is also available with general area light pattern in order to be used in parking garage stairwells and general garage security. This parking garage fixture is available in 30-watt, 45-watt and 60-watt configurations. The LED parking garage light is an energy efficient light source that lasts up to 60% longer than standard lighting.



L-CPPG MODEL NUMBERS

L-CPPG-30W

30 watt, 3,500 lumen output

L-CPPG-45W

45 watt, 4,900 lumen output

L-CPPG-60W

60 watt, 7,000 lumen output

LVTSHB MODEL NUMBERS

LVTSHB-4-60W

4-FT., 60 watt, 6600 lumen output

LVTSHB-8-120W

8-FT., 120 watt, 13,200 lumen output



The LVTSHB Vapor Tight Series is an excellent choice for a highly efficient, low cost vapor tight parking garage solution. The LVTSHB is available in either 4-ft. or 8-ft. lengths and is rated IP65 (waterproof). The fixture is constructed with an extruded aluminum body which provides excellent heat dissipation. Diffuser is high strength polycarbonate, which in combination with the aluminum body, makes the fixture virtually indestructible.



“LAL-SB Series” Shoe Box Style LED Exterior Area Light

The LAL-SBC series is an IP65 rated fixture for outdoor use. The SBC Area Light is ideal for outdoor applications such as building perimeters, loading areas, drive ways sign and building flood lighting. ETL wet listed die-cast aluminum construction with impact resistant uv stabilized polycarbonate linear prismatic lens complete with stainless steel



MODEL NUMBERS

LAL-SB-100W
100 watt, 13,000 lumen output

LAL-SB-150W
150 watt, 19,500 lumen output

LAL-SB-200W
200 watt, 26,000 lumen output

LAL-SB-300W
300 watt, 41,000 lumen output



“LAL-SBC” Shoe Box Style LED Exterior Area Light

LAL series area lights are low profile replacements for up to 1000 watt existing metal halide and HPS area lighting. It features a high efficiency LED driver with high lumens and long life LED chips. The excellent optical design greatly improves light utilization and evenness. The LAL series has a cast aluminum design with better cooling for a low maintenance lighting solution. The LAL is ideal for outdoor applications such as urban roads, industrial areas, residential areas, sidewalks and parking lots.

LED Flood Lights

Our line of standard flood lights consists of products ranging from 70-watt (9,500 lumens) to 300-watt (40,000 lumens). Our IP65 flood light fixtures have a modular design which allows for easy maintenance. The LM80 LED life is >50,000 hours. Rugged die-cast aluminum housing offers excellent corrosion resistance. The dark bronze powder coating finish ensures lasting performance and maximum efficacy in harsh environments.



105 watt



300 watt

MODEL NUMBERS

LFL-70-5000

70 watt, 9,500 lumen output

LFL-105-5000

105 watt, 13,400 lumen output

LFL-150-5000

150 watt, 21,000 lumen output

LFL-200-5000

200 watt, 24,000 lumen output

LFL-250-5000

250 watt, 36,500 lumen output

LFL-300-5000

300 watt, 40,000 lumen output



LWP Wall Packs No Cut-Off



MODEL NUMBERS

LWP-S-45W

45 watt, 5,300 lumen output

LWP-S-70W

70 watt, 8,100 lumen output

LWP-L-90W

90 watt, 11,200 lumen output

LWP-L-135W

135 watt, 16,400 lumen output

The LWP Wall Pack Series are an LED, traditional look, no cut off wall pack. This highly efficient fixture is complete with polycarbonate diffuser that is far more break resistant than the traditional glass diffusers. The fixture is available in lumen output configurations ranging from 5,300 lm to 16,400 lm.



LWP Wall Packs Full Cut-Off



MODEL NUMBERS

LWP-FCO-L-45

Full Cut Off 45 watt, 4,900 lumen output

LWP-FCO-L-70

Full Cut Off 70 watt, 7,350 lumen output

LWP-FCO-L-90

Full Cut Off 90 watt, 9,500 lumen output

LWP-FCO-L-135

Full Cut Off 135 watt 14,000 lumen output

The LWP-FCO Full Cut Off Series wall pack fixtures represent the best of the high lumen full cut off wall packs. The fixtures are standard with high strength polycarbonate diffuser and are available in multiple lumen output configurations.



LED Wall Mount

MODEL NUMBERS

LWM-17W
17-watt, 2,000 lumen output

LWM-25W
25-watt, 2700 lumen output



The L-WM Series is an LED Wall Mount light for outdoor applications. The LED Wall Mount is an energy efficient light source that last up to 60% longer than standard lighting. The fixture is designed for security, pathway, entrances/exits, and perimeter lighting applications.



LED Wall Mount

The LWM-Series LED luminaire provides a classic appearance and delivers up to 2700 Lumens. Its advanced LEDs deliver an expected service life of more than 10 years which eliminates the frequent lamp and ballast replacements associated with older technologies. The LWM LED replaces 25-50W metal halide fixtures and provides energy savings of up to 75% vs. comparable metal halide luminaires.

LED Canopy



The L-CP Series is an LED Canopy light for outdoor applications. The LED Canopy light is an energy efficient light source that last up to 60% longer than standard lighting. The fixture is designed for security, garage parking, pathway, warehouse, entrances/exits, and perimeter lighting applications.

MODEL NUMBERS

L-CP-S-45

45 watt, 4,200 lumen output

L-CP-L-60

60 watt 6,600 lumen output



LED Canopy Lighting

LED Canopy Light series can be used in indoor or outdoor lighting applications. General uses include parking garages, gas stations, storage warehouses and toll booth areas.



Our Commercial LED recessed and surface mounted fixtures are an important component of our entire product line. Offering recessed flat panels, recessed center basket troffer and surface mounted wraparound fixtures, our high quality line can accommodate most all project requirements.

Truex Lighting

LED Commercial Recessed & Surface Mounted Lighting

LED Recessed Flat Panels

2X4 LED Flat Panel



MODEL NUMBERS

LPL-50W-24

2X4, 50 watt, 6,500 lumen output

LPL-30W-22

2X2, 30 watt, 3,900 lumen output

The LPL LED provides high performance optical system to deliver general ambient lighting for applications such as schools, office building and hospitals. The recessed LED specification lay-in 2x2 and 2x4 fixtures are designed for installation in exposed t-bar ceilings. Fixture housing is a close structure design, constructed of high efficient heat sink aluminum for better heat dissipation to improve life of LED's. Fixture is complete with high resolution lens. High efficiency, drop in replacement of fluorescent troffers. Dimming option available. Easy fold out clips for t-bar mount.

2X2 LED Flat Panel



LED Wrap Around Fixture



MODEL NUMBER

LW-4-40
40 Watt 4,540 Lumen Output

The LW-4-40 Series fixture Housing consist of die formed cold rolled steel housing with a white powder coat finish. Acrylic, high performance, prismatic acrylic lens. Ends complete with knock out for row mounting. Fixtures are standard for use in 120-277 volt environments. Long-life LEDs, coupled with high-efficiency drivers, provide superior level and quality of illumination for extended service life. Fixture life is in excess of 50,000 hours.

LED Wrap Around



The LW-4-40 Series fixture is a versatile utility based, traditionally styled LED wraparound series which offers broad range of uses including commercial, schools, institutional, retail and residential applications. This High quality luminaire series utilizes the latest solid state LED lighting and advanced electronic driver technology which provides optima lighting performance in maximizing energy savings. The LW-4-40 is designed to provide long service life eliminating re-lamping issues and minimizing maintenance common with traditional fluorescents.

Truex Lighting



The Truex team members are engaged, empowered, enthusiastic, and committed to the success of the company. Truex creates an environment for open, continuous, and proactive communication maintaining an open mind to benefit from diverse thoughts and ideas through our Truex Core Values Program. Truex is dedicated to customer support to ensure that expectations and goals are set, monitored and executed. This allows Truex to shine and stand out in the lighting industry. Our ability to interpret concepts, adapt and exceed expectations allows us to have a unique relationship with our customers. Truex strives for continuous improvement employing both technological advances and our customer's valued input to help drive and expand our product line.



Truex Lighting - Core Values



Truex Lighting

**11108 E. 56th Street
Tulsa, Oklahoma 74146
(918) 250-7641
info@truexlighting.com
www.truexlighting.com**