Ť **Truex** Lighting

RHB1-6 Series LED High Bay Fixture

RHB1-6-M-200 round high The bay fixture exceptional 80+CRI delivers high lumen output with light while achieving 25,000 lumen output levels. The lens guarantees light intensitv and uniformity. The RHB1-6 Series round high bav fixture is designed to replace either HID or fluorescent high bay fixtures.

Aluminum Construction

The housing, consisting of aluminum finned material acts as an excellent heatsink channeling heat out and away from the LED's.

Electrical


Long-life Philips LED system delivers optimal performance. LED's available in 82+ CRI, 5000k. Projected LED life is greater than 50,000 hours. Fixture is cULus listed. Electronic drivers are available for 120- 277V and 347/480V applications.

Finish

Black power coated aluminum construction provides protection against contaminants and oxidation.

Optics

Precision designed optics deliver even illumination. General and aisle distribution ensures superior performance to key areas within an application. The lens design allows maximum delivered lumens in any industrial or commercial environment.

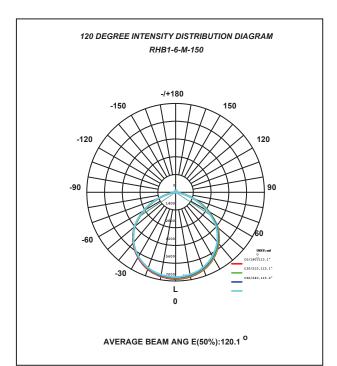



ECONOBAY

Round LED High Bay 190-watt 25.000 lumens

RHB1-6-M-200

Performance

The RHB1-6M-200 luminaire offers:

- > 132 lumens/watt
- > CRI >80; THD <10%
- > PF >99
- > Projected LED life is greater than 50,000 hours

Electrical and Warranty

Fixture is standard with long life LED modules by Philips. LED modules and drivers are offered with a standard 5-year warranty based on performance under normal conditions (consult warranty for details).

Compliance

This fixture is UL listed and IP65 rated for wet locations and -40°C to +40°C ambient environments. DLC and RoHS compliant. LED modules comply with IESNA LM-79 and LM-80 standards.